

PAR series




Professional stage



Product Specifications


Model:	RD-PAR56-F6-26/36/50W
Voltage:	AC100-130V/AC200-240V AC100-240V/AC/DC12V
Wattage:	26/36/50W
CCT:	2600-7000K/RGB
CRI:	>80Ra
Beam Angle:	15°/25°/45°/60°/120°
Base:	GX16D/PG9
Luminous Efficiency:	120LM/W
Lamp material:	Thermal conductive plastic + aluminum
Light source:	Integrated light source SMD
Product Sizes:	Ø176.5*117.2mm
Application:	Indoor/Underwater

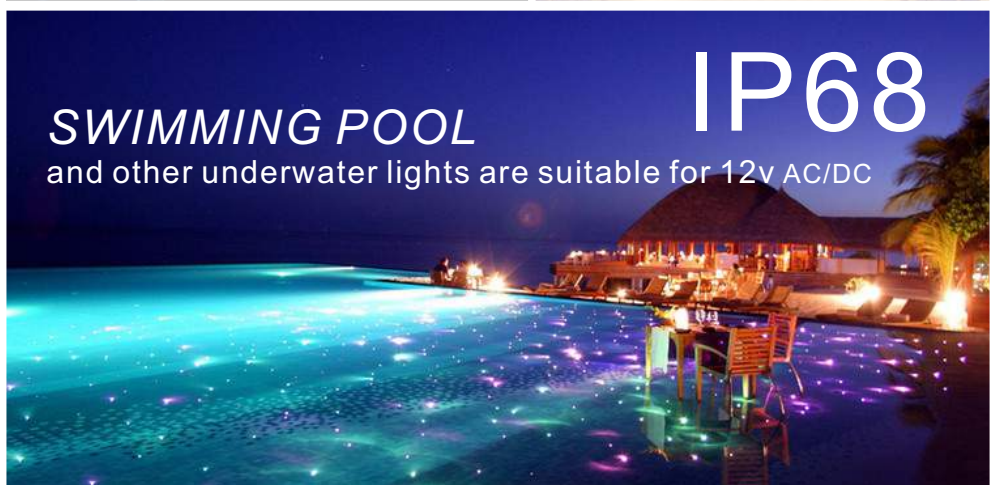

SWIMMING POOL

IP68

and other underwater lights are suitable for 12v AC/DC

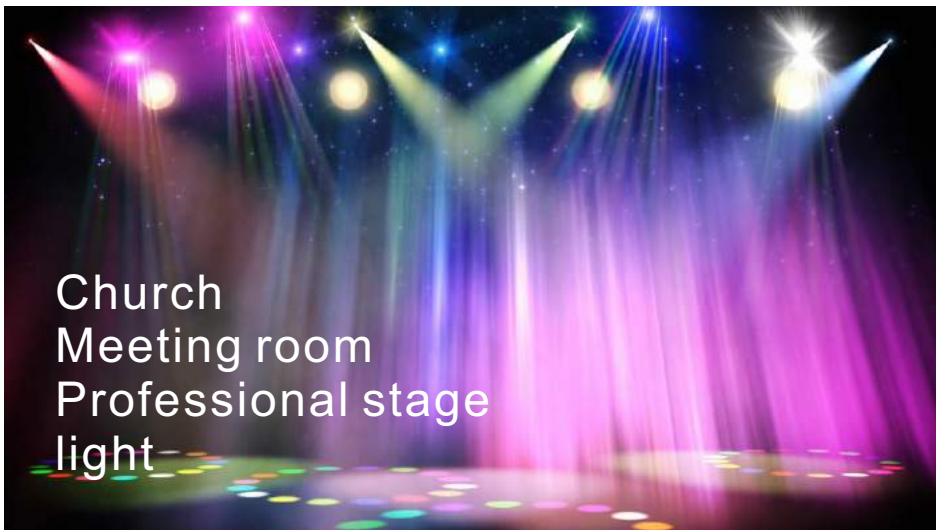

Church
Meeting room
Professional stage
light



Product Specifications

Model:	RD-PAR64-F6-36/46W
Voltage:	AC100-130V/AC200-240V AC100-240V/12VAC/DC
Wattage:	36/46W
CCT:	2600-7000K/RGB
CRI:	>80Ra
Beam Angle:	15°/25°/45°/60°/120°
Base:	GX16D/PG9
Luminous Efficiency:	120LM/W
Lamp material:	Thermal conductive plastic + aluminum
Light source:	SMD
Product Sizes:	Ø204*126mm
Application:	Indoor



swimming pool




church

LED PAR20/PAR30/PAR38 Bulb




RD-COB-PAR20-8W/10W/12W/16W-B




Real Power	8W/10W/12W/16W
Light Source	COB Epistar
Lumen	800Lm/1000Lm/1200Lm/1600Lm
Color Temperature	3000K/4000K/6000K
CRI	Ra>80
Voltage	85-265VAC
Size	Φ63x85mm/63x93mm(16W)
Beam angle	200°
Dimmable	optional 110/230V

RD-COB-PAR30-30W-C (plant growth lamp)




Real Power	30W
Light Source	COB Epistar
Lumen	3000Lm
Color Temperature	3000K/4000K/6000K
CRI	Ra>80
Voltage	85-265VAC
Size	Φ95x126mm
Beam angle	15°/24°/36°/60°
Dimmable	optional 110/230V
Base	E27/E26/G12

RD-COB-PAR30-15W/20W/25W/30W/35W/40W-B



Real Power	15W/20W/25W/30W/35W/40W
Light Source	COB Epistar
Lumen	1500Lm/2000Lm/2500Lm/3000Lm/3500Lm/4000Lm
Color Temperature	3000K/4000K/6000K
CRI	Ra>80
Voltage	85-265VAC
Size	Φ95x126mm
Beam angle	15°/24°/36°/60°
Dimmable	optional 110/230V

RD-COB-PAR38-20W/25W/30W/35W/40W/45W-B



Real Power	20W/25W/30W/35W/40W/45W
Light Source	COB Epistar
Lumen	2000Lm/2500Lm/3000Lm/3500Lm/4000Lm/4500Lm
Color Temperature	3000K/4000K/6000K
CRI	Ra>80
Voltage	85-265VAC/220V (optional)
Size	Φ120x135mm
Beam angle	15°/24°/36°
Dimmable	optional 110/230V



Attention:

- ⊙ Lifespan of the bulbs will be effected while working ambient temperature that higher 45°C/113°F.
- ⊙ The inner space of enclosed fixtures should be 5 times bigger than the size of the bulbs.
- ⊙ The dimming level for dimmable products would be under a certain dimmer, it is better to take samples for testing the dimming function.